


SINGLE/DOUBLE LEATHERETTE FITTING INSTRUCTIONS - SC1278B



Remove headrests from your seats

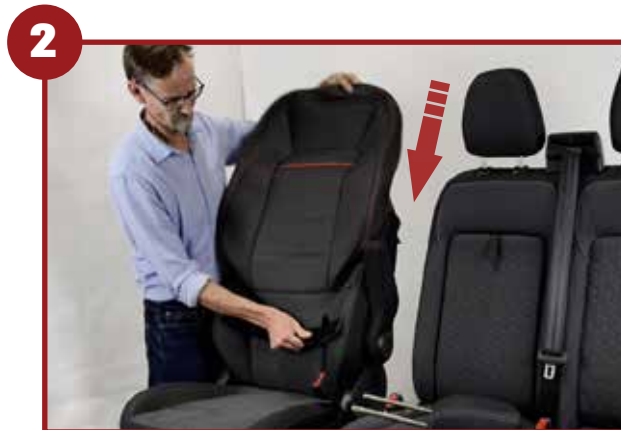

Slide driver's cover over the driver's seat



Push bottom of the cover through the seat joint



Attach the velcro at the back of the driver's seat



Push the material underneath the headrest guide inserts



Push the driver's seat base cover through the seat joint

SINGLE/DOUBLE LEATHERETTE FITTING INSTRUCTIONS - SC1278B

7



Tuck the material into sides of the seat moulding

8



Attach hooks to the elastic bands on the bottom of the cover

9



Attach the hooks to the underside of the seat securely

10



Remove any armrest caps on the armrest

11



Slide the armrest covers fully over the armrests

12



Tuck the material underneath the hinge cap, and reattach cap

SINGLE/DOUBLE LEATHERETTE FITTING INSTRUCTIONS - SC1278B

13



Attach and velcro the headrest cover to the headrest

14



Lift seat base and slide on base covers

15



On the underside, fold the tab underneath upholstery fixing

16



Secure all tabs underneath the edge

17



Slide the back covers over the back of the passenger seats

18



Tuck the material underneath the seatbelt housing

SINGLE/DOUBLE LEATHERETTE FITTING INSTRUCTIONS - SC1278B

19



Tuck the velcro flap behind the underneath of the seats

20



Attach the velcro securely at the back of the seats

21



Attach the plastic hook behind the pull down tray panel

22



Slide the tray cover on, pulling through the fabric loop

23



Pull through velcro and attach securely at the base of the tray

24



Assemble and enjoy your seat covers